



panel fabric


BID FABRIC

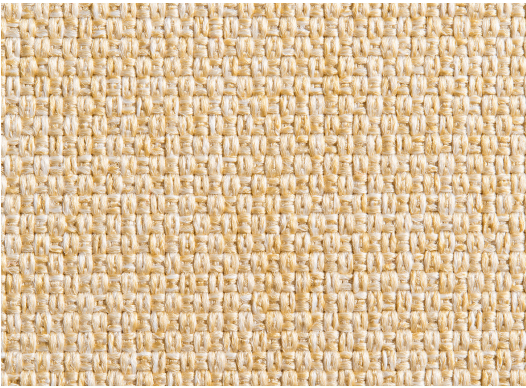


sand F5181*




oceanic F6131*




aurora F6121*




dusk F6171*



seaside F5191

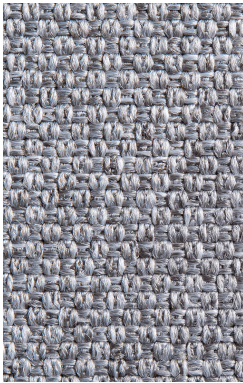


stone F6151

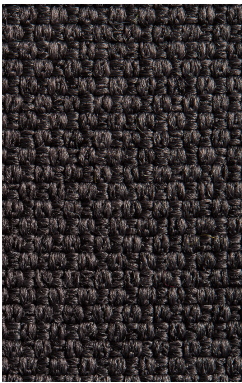


nightfall F6161



pebble F5171



sunset F6141*



moss F6111*


zapote




garter F4141




lace F4181



stockinette F4151




intarsia F4171




cable F4161

crevasse

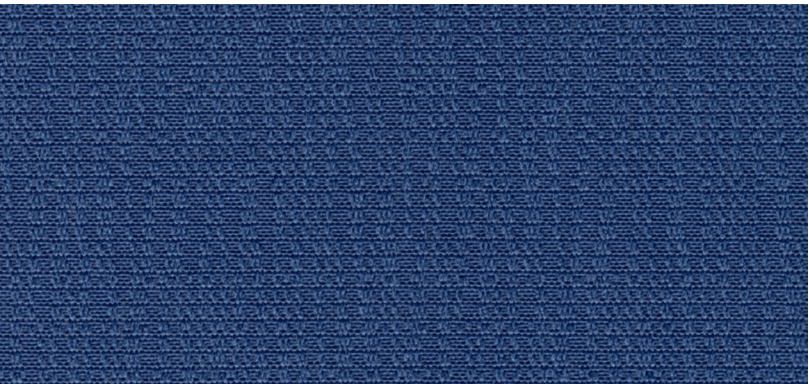

crown blue F3191

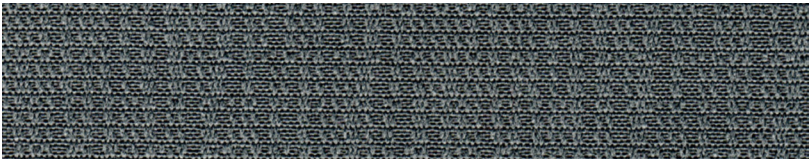

neutral grey F3201




chamonix F3181

BID FABRIC


commerce




slate F2141



sand F2151 DISCONTINUED




grey F2161

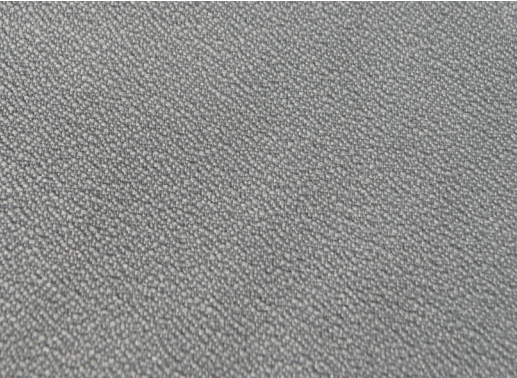


steam F2201




kiwi F2221 DISCONTINUED

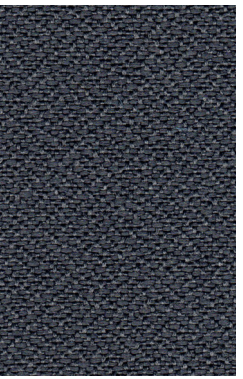


steel grey F2171

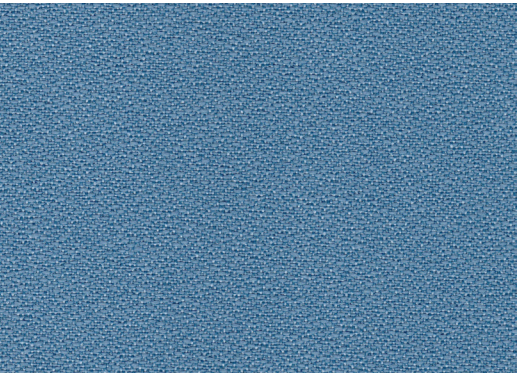

cyan blue F2211



citrus F2231 DISCONTINUED




fjord F2181


reticolo



amaranth F4131 DISCONTINUED

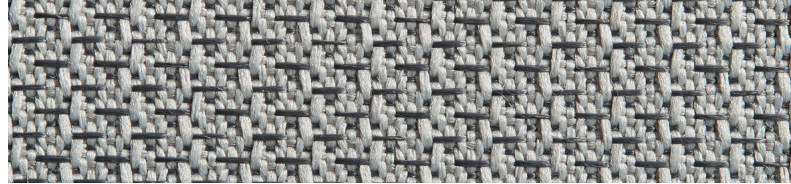

grain F4111

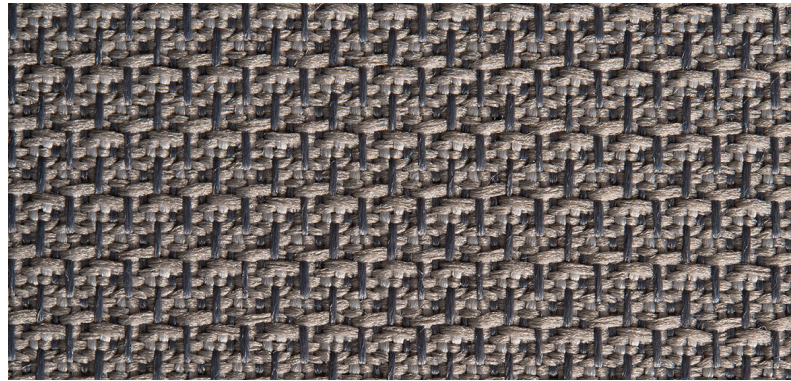

seed F4121

UPGRADED

UPGRADE


*Available with extended lead times and subject to case-by-case evaluation.

panel fabric chase


UPGRADE



pumice F9872




chambray F9882



moss F9892



shadow F9852



pewter F9862

binary



blueray F5202




chipset F5212



modem F5222




optical F5232




matter F5242


metallation

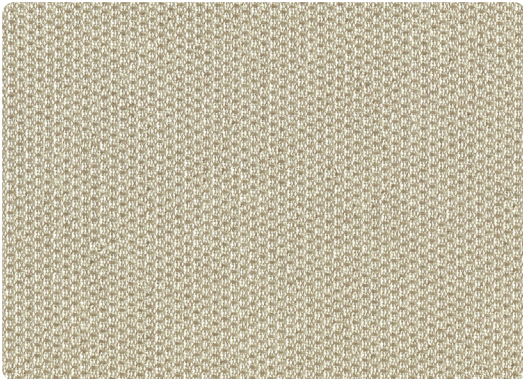


chrome F3202




stainless F3212




polished pewter F3222



welded steel F3252



dark annealed F3242




bronze F3262




fired titanium F3282

purpose

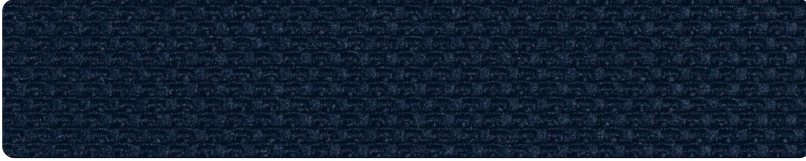

objective F8922

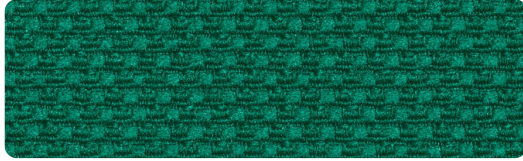


direction F8902




target F8872



intend F8812



ambition F8802

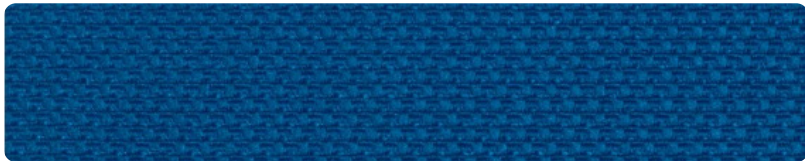


focus F8912



reason F8932

UPGRADE

broadcast



chicory F0202




graphite F0212



mink F0222




serengeti F0232




shade F0242


whisper

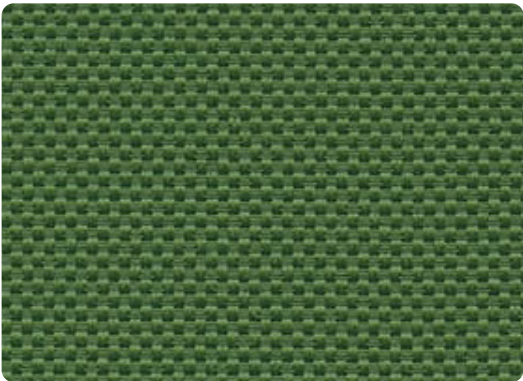


baffle F4662

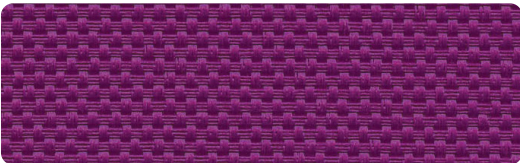


mum F4732



mystery F4692




placid F4672

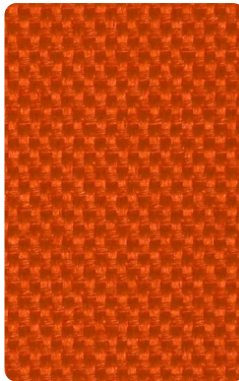

mellow F4712



chant F4722

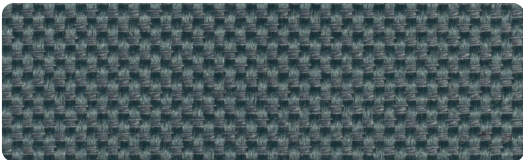

lull F4622



peep F4702




muffle F4582




reserve F4652

UPGRADE


cascade




stack F4202



plutonic F4282




bauxite F4232

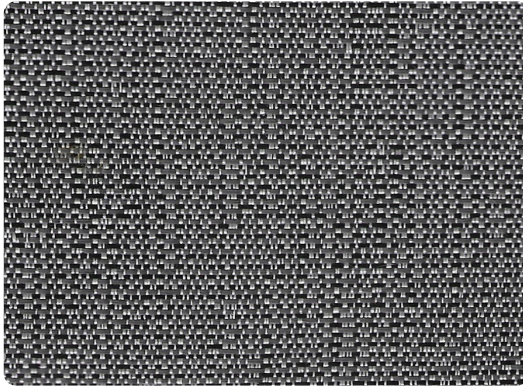

igneous F4262



alluvium F4212



aquifer F4252


seating fabric |

UPGRADES


millennium c zero |



clean F8562
grade 2



amber F8512



peridot F8682



anchor F8522




voyage F8782




coastal F8572



onyx F8662

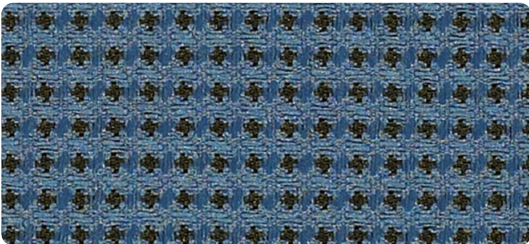

sky F3582




lemon F3552



festive F3522




leaf F3572



fog F3512



latte F3562



tuxedo F3502


feltro |



cloud F9583



birch F9533




sprout F9683




steel F9703



spa F9673




dusk F9593



ink F9613

mello |

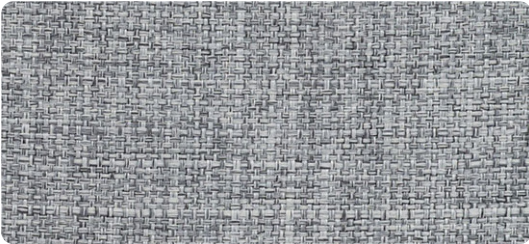

mineral F7893



thicket F7963



fossil F7843



sable F7943



river F7933



aegean F7783



fushcia F7853

canter |N/A



quarry F5786



alfalfa F5516




storm F5856



ballad F5536



lucid F5696



ink F5666



onyx F5746

fabric specifications

pattern	content	width	weight	 breaking strength	 colorfastness to light	 flammability
millennium c zero	85% post consumer recycled polyester, 15% polyester	54" usable	0.99 lbs	ASTM 5034 336 lbs. min. warp 279 lbs. min. fill	AATCC 16 opt 3, class 4 60 hours min.	CA Bulletin 117 2013, UFAC class 1, NFPA 260 class 1, ASTM E-84
feltro	100% polyester	56" usable	1.23 lbs	ASTM 5034 306 lbs. min. warp 299 lbs. min. fill	AATCC 16 opt 3, class 4 60 hours min.	CA Bulletin 117 2013, UFAC class 1, NFPA 260 class 1, ASTM E-84
mello	80% post consumer recycled polyester, 20% polyester	56" usable	1.01 lbs	ASTM 5034 379 lbs. min. warp 352 lbs. min. fill	AATCC 16 opt 3, class 4 60 hours min.	CA Bulletin 117 2013, UFAC class 1, NFPA 260 class 1, ASTM E-84
canter	100% EPU polyurethane polyester backing	54" usable	1.72 lbs	ASTM 5034 0 lbs. min. warp 0 lbs. min. fill	AATCC 16 opt 3, class 4	CA Bulletin 117 2013, UFAC class 1, NFPA 260 class 1
expo	65% post industrial recycled polyester, 35% post consumer recycled polyester	54" usable	0.54 lbs	ASTM 5034 142 lbs. min. warp 143 lbs. min. fill	AATCC 16 opt 3, class 4	CA Bulletin 117 2013, UFAC class 1, NFPA 260 class 1

NOTE: Dye lots may vary slightly from samples shown.